

SJE 08 LM / XL



AceMicromatic
Group Company

JOBBER EVO



CNC TURNING SOLUTIONS

Machine Features

- Powerful AC Spindle motor
- Step Up Z-axis Structure
- High speed 3500 rpm spindle
- Thermally stabilised spindle
- Pre-tensioned ball screw support
- Heavy duty bi-directional hydraulic turret (8 station)
- 0.45 sec. station-to-station Turret Indexing time
- 100% ball bar tested
- LASER calibrated axes
- Separate coolant tank for easy maintenance
- MachineConnect™ software

LM - Linear motion guideways

XL - Hardened & ground box guideways

Standard Accessories

- AC spindle motor & axes drives
- Precision guideways on both axes
- Tailstock with live center
- Automatic centralized oil lubrication
- Hydraulic power operated chuck (Ø200 mm)
- AC unit for electricals
- Programmable quill
- 3 tier lamp
- Rigid tapping
- Drain line oil cooler
- Basic hydraulic system
- OD tool holder clamping block (8 nos)
- Boring bar holder (4 nos)
- Facing tool holder (2 nos)
- Set of sleeves

Optional Accessories

- Hydraulic power operated Chuck (Ø250 mm)
- Voltage stabilizer - 25 kVA
- Chip conveyor rear/side mount
- TPM - Trak productivity monitoring system
- Tailstock with built-in revolving center
- Auto door
- 12 station turret
- High pressure coolant system

THINK Turning® Ace Designers

Follow us on :



Ace Designers



@acedesignersblr




@acedesigners



THE LARGEST MACHINE TOOL GROUP IN INDIA


www.acementromatic.net

Machining Range Diagram

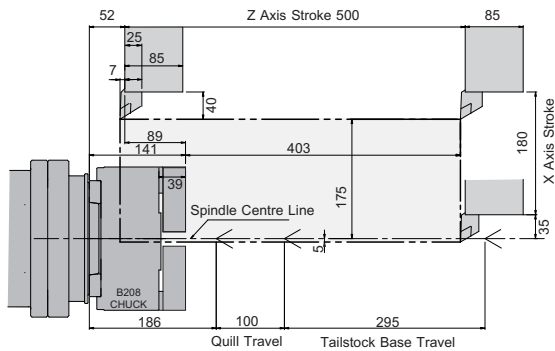


Interference Diagram


(8 Station Turret)

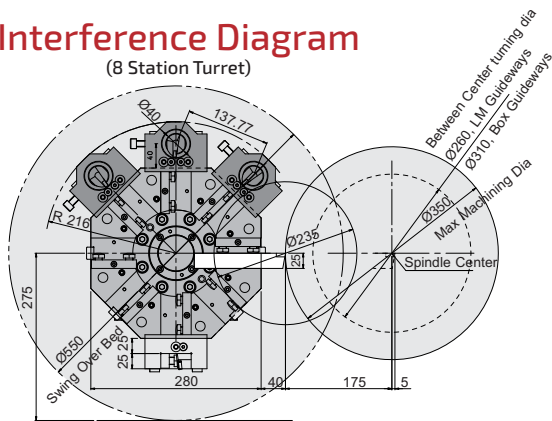

Power Torque Diagram

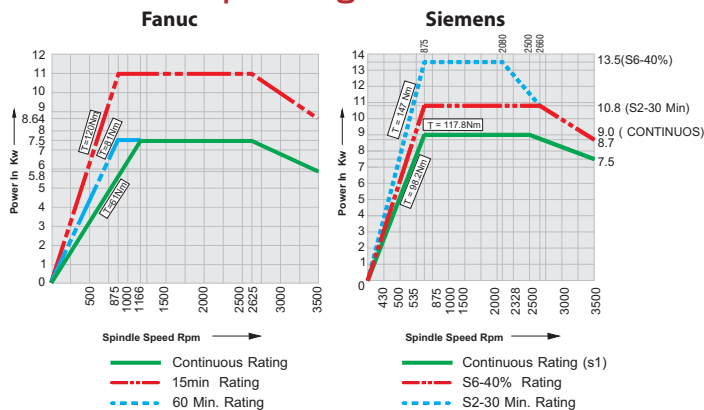

Overall Views

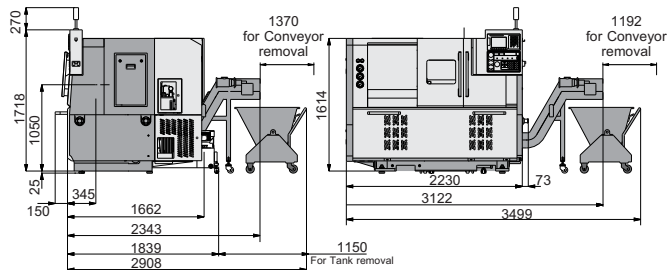

Manufactured by:

Ace Designers Ltd.

Plant I - Plot No.7 & 8, II Phase, Peenya Industrial Area, Bangalore - 560 058, India

Tel : +91-80-2218 6700, Fax : +91-80-2218 6723, E-mail : info@acedesigners.co.in

INDIA-Marketed & Serviced by **Micromatic®**

Ahmedabad +91 7925471145; Ambattur +91 98407 85521; Aurangabad +91 240 2552309; Bangalore +91 80 40200555; Belgaum +91 99800 02597; Bommasandra +91 80 27834836;

Chakan +91 2135 322002; Chennai +91 44 40440700; Coimbatore +91 422 4506183, 6588595; Delhi +91 11 22414232/ 42448095; Faridabad +91 129 4047000; Gurgaon +91 124 4745500 / 4745500;

Hyderabad +91 40 23070496; Indore +91 73899 39190, 73899 39191; Jamshedpur +91 657 6539931; Kolhapur +91 230 2460444, 2460123; Kolkata +91 33 26710158 / 2710100 / 033-64578825

Ludhiana +91 97791 28296; Mumbai +91 22 26861009/1976/7271/7272; Nasik +91 253 6610254; Pune +91 20 40712111/27479661/9662; Rajkot +91 7698000728 Ranipet +91 4172 272732;

Rohtak +91 8295043311; Rudrapur +91 95570 30224, +91 97201 06532; Tambaram +91 44 22265531; Thane +91 22 25829062 Trichy +91 431 2443066 Chandigarh +91 99141 91057 Bhiwadi +91 99581 09777

INTERNATIONAL

Germany +49 (0) 172 231 6688 Shanghai +86 (21) 586 650 31/32; Switzerland +41 32 652 58 41

Email: salesmmt@acemicromatic.com

Specifications

SJE 08 LM / XL

Control System	Fanuc / Siemens
Smart Feature	MachineConnect™
Capacity	
Swing Over Bed	550 mm
Distance Between Centers ¹	464 mm
Maximum Turning Dia ²	350 mm
Between Center Turning Dia	260/310
Maximum Turning Length ¹	500 mm
Max. turning length from chuck jaw face	400 mm*
Spindle	
Spindle Nose	A2-6
Bore Through Spindle	63 mm
Front Bearing Bore	100 mm
Maximum Bar Capacity ³	51 mm
Maximum Spindle speed ³	3500 rpm
Spindle Motor Power - Fanuc (Continuous / 15 min. Rating)	7.5/ 11 kW
Spindle Motor Power-Siemens (Continuous / 30min/S6-40%rating)	9 / 10.8 / 13.5 kW
Full Power Range	Fanuc 1166 - 2625 rpm Siemens 875 - 2500 rpm
Standard Chuck Size	Ø200 mm
Axes	
Type of Guideways	Liner motion / HGBT
X-Axis Stroke	180 mm
Z-Axis Stroke	500 mm
X & Z Axes Rapid Rate	30 / 20 m/min
Tooling	
Number of Tools Maximum	8 (12)
Boring Bar Dia Maximum	40 (32)mm
OD Turning Tool Size	25 x 25 (20x20) mm
Tailstock	
Tailstock Base Travel	295 mm
Tailstock Quill Travel	100 mm
Tailstock Quill Dia.	80 mm
Quill Taper	MT-4
Hydraulic System	
Hydraulic Pump Capacity	14 lpm
Hydraulic Power Pack Tank Capacity	45 litre
System Pressure	30 Kg/cm ²
Coolant Tank Capacity	150 litre
Overall Machine Dimensions (L x W x H)	2230 x 1950 x 1740 mm
Overall Weight (Without Packing)	~ 3500 kg

- 1 Refer machining range diagram,
 - 2 Refer Interference diagram
 - 3 With appropriate workholding, HGBT - Hardened Ground Box Type
- () Values mentioned in bracket are optional, * - Considering Standard chuck size

Note:

Specification are correct at the time of print. Owing to continuous up-gradation of our products, the specification may change and to be reconfirmed at the time of ordering.

